

Thermal Network Mini Hybrid Speed Dome

Quick Start Guide



Foreword

General

This manual introduces the functions and operations of the thermal network mini hybrid speed dome device (hereinafter referred to as "the Camera").

Safety Instructions

The following categorized signal words with defined meaning might appear in the manual.

Signal Words	Meaning
 DANGER	Indicates a high potential hazard which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury.
 CAUTION	Indicates a potential risk which, if not avoided, could result in property damage, data loss, lower performance, or unpredictable result.
 TIPS	Provides methods to help you solve a problem or save you time.
 NOTE	Provides additional information as the emphasis and supplement to the text.

Revision History

Version	Revision Content	Release Time
V1.0.1	Updated product name.	December 2020
V1.0.0	First release.	January 2019

Privacy Protection Notice

As the device user or data controller, you might collect personal data of others such as face, fingerprints, car plate number, email address, phone number, GPS and so on. You need to be in compliance with the local privacy protection laws and regulations to protect the legitimate rights and interests of other people by implementing measures include but not limited to: providing clear and visible identification to inform data subject the existence of surveillance area and providing related contact.

Interface Declaration

This manual mainly introduces the relevant functions when you use the device. The interfaces used for manufacture, returning to the factory for inspection, and locating fault are not described in this

manual. Please contact technical support if you need information about these interfaces.

About the Manual

- The manual is for reference only. If there is inconsistency between the manual and the actual product, the actual product shall prevail.
- We are not liable for any loss caused by the operations that do not comply with the manual.
- The manual would be updated according to the latest laws and regulations of related jurisdictions. For detailed information, refer to the paper manual, CD-ROM, QR code or our official website. If there is inconsistency between paper manual and the electronic version, the electronic version shall prevail.
- All the designs and software are subject to change without prior written notice. The product updates might cause some differences between the actual product and the manual. Please contact the customer service for the latest program and supplementary documentation.
- There still might be deviation in technical data, functions and operations description, or errors in print. If there is any doubt or dispute, we reserve the right of final explanation.
- Upgrade the reader software or try other mainstream reader software if the manual (in PDF format) cannot be opened.
- All trademarks, registered trademarks and the company names in the manual are the properties of their respective owners.
- Please visit our website, contact the supplier or customer service if there is any problem occurring when using the device.
- If there is any uncertainty or controversy, we reserve the right of final explanation.

Important Safeguards and Warnings

This chapter describes the contents covering proper handling of the device, hazard prevention, and prevention of property damage. Read these contents carefully before using the device, comply with them when using, and keep it well for future reference.

Installation and Maintenance Professionals Requirements

All the installation and maintenance professionals must have qualification certificate or experiences of installing and maintaining CCTV system, electric apparatus in the explosive gas environment and working high above the ground. Besides, they have to acquire the following knowledge and operation skills.

- Basic knowledge and installation skills of CCTV system.
- Basic knowledge and operation skills of low voltage wiring and low voltage electronic circuit wire connection.
- Basic knowledge and operation skills of electric apparatus installation and maintenance in hazardous sites.

Power Requirements

- All installation and operation should conform to your local electrical safety code.
- Please check if the power supply is correct before operating the device.
- Use power supply conforming to SELV requirements and power the camera in the rated voltage conforming to Limited Power Source in IEC60950-1. And, refer to the camera label's power supply requirements for your final operation.
- Please install easy-to-use device for power off before installing wiring, which is for emergent power off when necessary.
- Please prevent the line cord from being trampled or pressed, especially the plug, power socket and the junction from the device.

Application Environment Requirements

- Please use the device within the allowed humidity (<95%RH) and altitude (<3000m).
- Do not use the device in the corrosive environment such as high salt fog area (sea, beach and coastal area), acid gas environment and chemical plants.
- Do not use the device in the strong vibration environment such as in boats and vehicles.



If you still want to use thermal cameras in the three conditions mentioned above, please contact our sales staff to buy cameras of special model or cameras that are customized. If you use cameras in improper environments, we shall not take the costs of camera damage.

- Please don't place the device in the humid, dusty, extremely hot and cold site with strong electromagnetic radiation or unstable illumination.
- Please don't block the ventilation opening near the device, which is to avoid heat accumulation

for the device.

- Please don't install the device near the place with heat source, such as radiator, heater, stove or other heating equipment, which is to avoid fire.
- Please don't aim the lens at intense radiation source directly (such as sun, laser and molten steel etc.), which is to avoid causing damage to the thermal detector.
- Please don't let any liquid enter the device, which is to avoid causing damage to the internal components; please stop using the device immediately and cut off the power, plug out all the cables which are connected to the device if there is liquid entering the device, and contact the local customer service center.
- Please don't stuff any foreign matter into the device in case that it may cause device short circuit, which may cause damage to the device or human injury.
- Please use the factory default package or material with equal quality to pack the device when transporting the device.
- Please don't press, vibrate or soak the device during transportation, storage and installation.

Operation and Maintenance Requirements

- Please don't touch the heat dissipation component of the device in case you may get burnt.
- Please don't dismantle the device; there is no part which can be repaired by users themselves. It may cause water leakage or bad image for the device if it is dismantled unprofessionally.
- It is recommended to use the device together with a lightning arrester, which is to improve the effect of lightning protection, it needs to conform to the lightning protection regulation for outdoor application.
- Do not touch the photosensitive device with your hands. To clean the dust and filth on the lens, an air blower can be used. For further cleaning, please pour a little alcohol into a piece of dry cloth with which you can softly wipe the dirt away.
- Clean device body with a piece of soft dry cloth. For any dirt hard to remove, pick up a piece of clean and soft cloth, dip it with a little neutral detergent and gently wipe the dust away with it -- after that, wipe all the liquids on the device away with another dry cloth. Never use any volatile solvent such as alcohol, benzene and thinner, or any cleaner that is strong and abrasive. Otherwise, the device's surface coating will be hurt and its working performance will be encumbered.



WARNING

- Please modify the default password after login, in case it is stolen.
- Please use the accessories regulated by the manufacturer, and the device should be installed and maintained by professionals.
- Internal and external ground connection should be stable.
- Please don't provide two or more power supply modes to the device, otherwise, it may cause damage to the device.
- Around 2.5m long control cable is reserved when the device is delivered out of factory, it should use explosion proof flexible tube or armor cable to protect when the control cable is connected to the explosion proof control cabinet.
- Please cut off power before device maintenance and overhaul. It is prohibited to open the cover

with power on in the explosion environment.

- Please make sure all the explosion proof components and parts are complete without any cracks and there is no defect which may affect explosion proof performance.
- Please contact the local dealer or the nearest service center if the device fails to work normally, please don't dismantle or modify the device.

Table of Contents

Foreword	I
Important Safeguards and Warnings	III
1 Unpacking the Box	7
2 Design	8
2.1 Dimensions.....	8
2.1.1 Camera.....	8
2.1.2 Brackets	8
2.2 Cable.....	10
3 General Configuration	12
3.1 Initializing Camera.....	12
3.2 Modifying IP Address.....	13
3.3 Live Video.....	13
4 Installation	15
4.1 Cable Preparation	15
4.2 Installing Camera	15
4.2.1 (Optional) Installing SD Card	15
4.2.2 Fixing Camera.....	16
4.2.3 Connecting Cable Ports.....	20
4.2.4 Installing Waterproof Connector.....	20
5 Configuring Alarm	21
Appendix 1 Cybersecurity Recommendations	23

1 Unpacking the Box

Refer to the following checklist and check the package. If you find device damage or any loss, contact the after-sales service.

Figure 1-1 Checklist

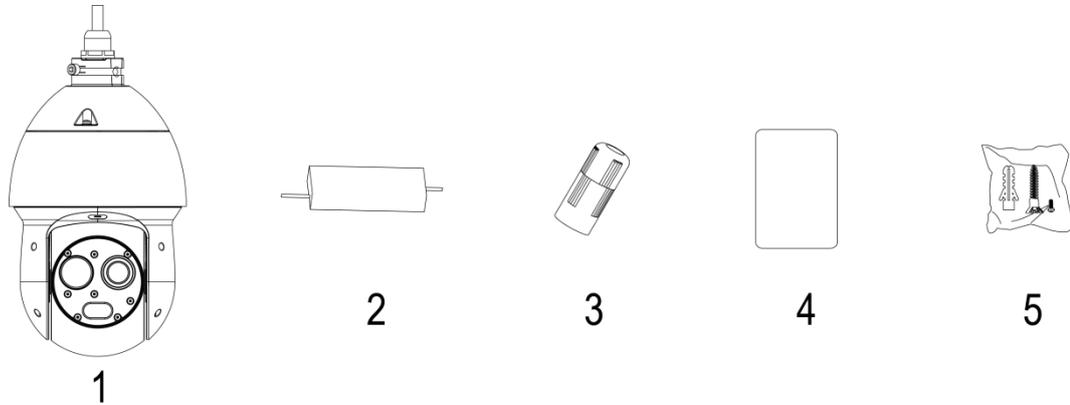


Table 1-1 Checklist description


No.	Name	No.	Name	No.	Name
1	Camera	2	Power cable	3	Waterproof connector
4	Quick Start Guide	5	Screw bag	—	—

2 Design

2.1 Dimensions

2.1.1 Camera

Figure 2-1 Dimensions (mm [inch])

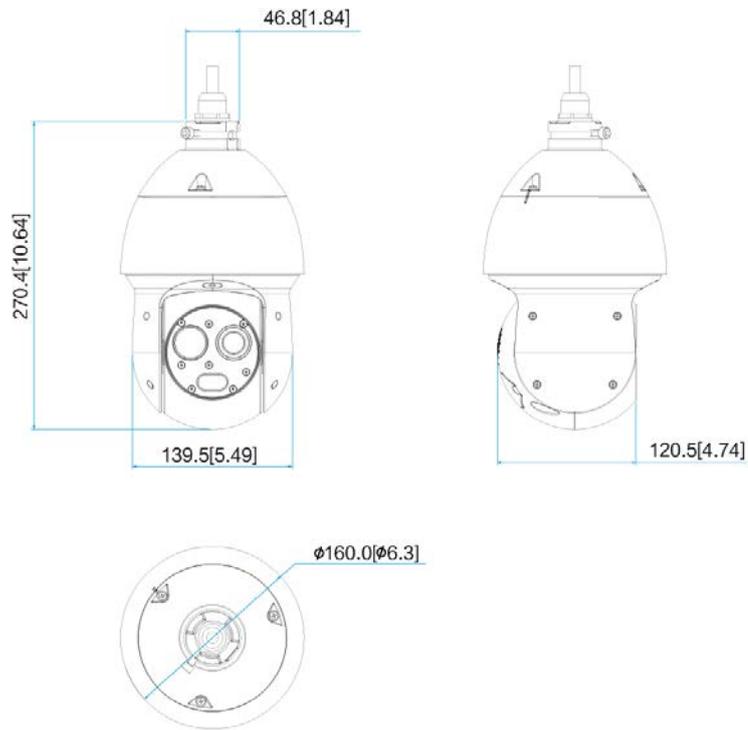

2.1.2 Brackets



- We do not provide brackets in the packing box and if you need them, purchase them separately.
- Brackets for different installation methods are as follows.

Figure 2-2 Wall-mount bracket (mm [inch])

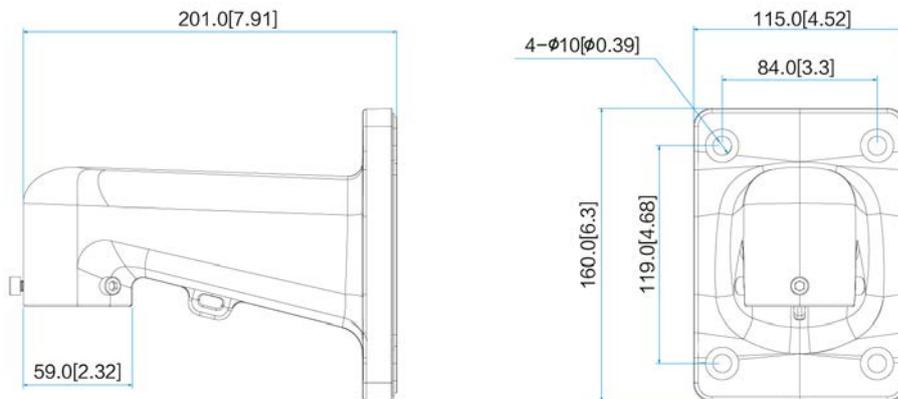


Figure 2-3 Pole-mount bracket (mm [inch])

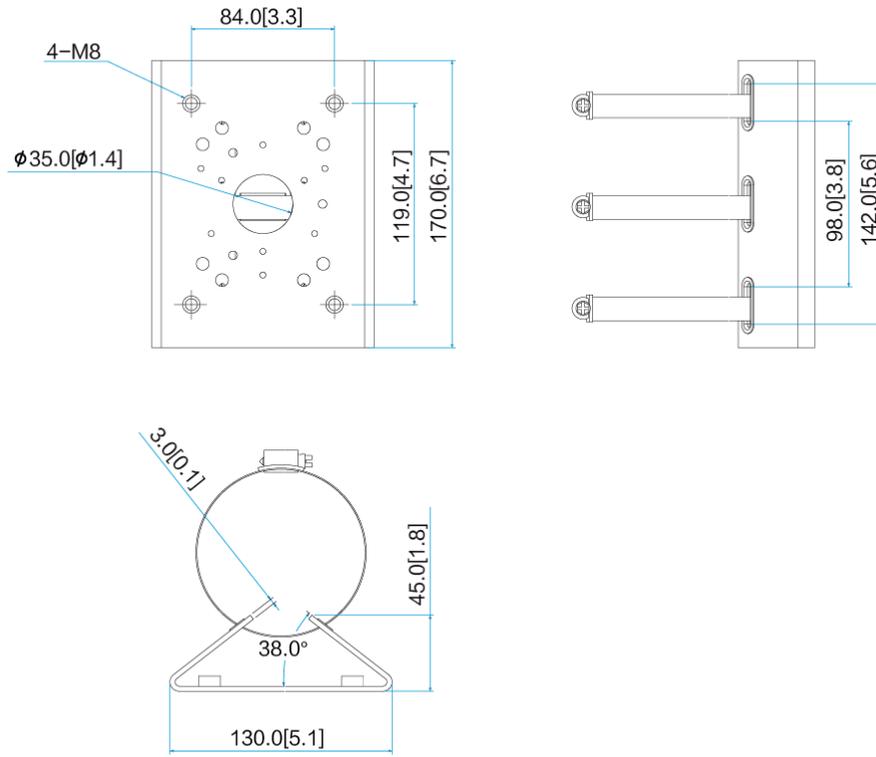


Figure 2-4 Corner-mount bracket (mm [inch])

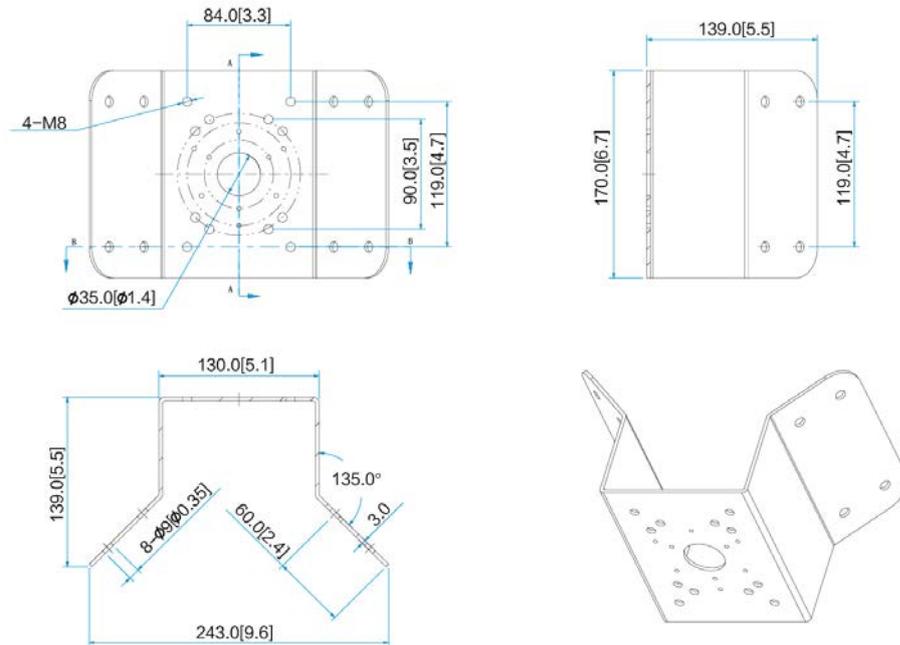


Figure 2-5 Ceiling-mount bracket (mm [inch])




2.2 Cable



Cable type might vary with different cameras, and the actual product shall prevail.

Figure 2-6 Cable ports

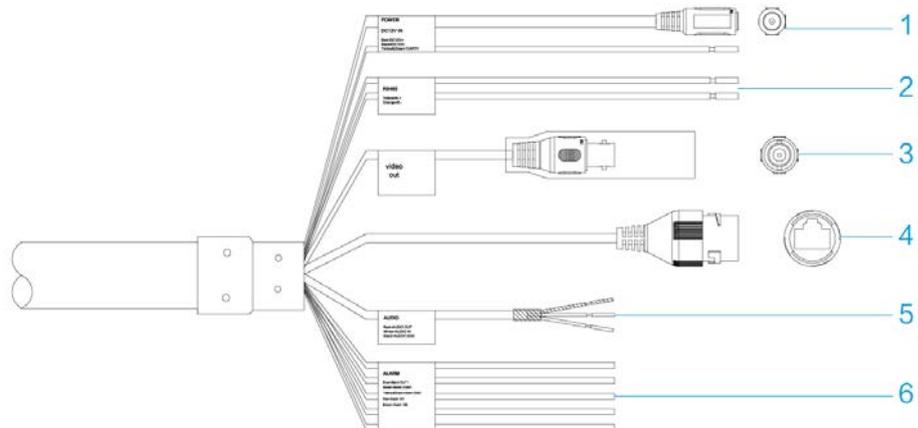

Please refer to Table 2-1 for more details about the cable function.

Table 2-1 Cable ports description

SN	Port	Port name	Connector	Function description
1	12V DC	Power input port	—	Inputs 12V DC power.
	EARTH	Ground terminal	—	Ground terminal
2	RS485_A (Yellow)	RS485 port	—	RS485 port, control PTZ and so on.
	RS485_B (Orange)			

SN	Port	Port name	Connector	Function description
3	VIDEO OUT	Analog video output	BNC	Generally it outputs analog video signal, it can connect to TV monitor to check image.
4	LAN	Network port	Ethernet port	Connect to standard Ethernet cable.
5	AUDIO IN (Red)	Audio input port	RCA	Input audio signal, receive analog audio signal from sound pick-up and other devices.
	AUDIO OUT (White)	Audio output port	RCA	Output audio signal to speaker and other devices.
	AUDIO GND (Black)	Audio ground terminal	—	Grounded terminal.
6	I/O	I/O port	Various external alarm apparatuses	Include alarm input, output. Please refer to Table 2-2 for more details.

Please refer to Table 2-2 for introduction of I/O port function.

Table 2-2 I/O port description

Port	Cable port name	Function description
I/O port	ALARM_OUT1 (Blue)	Alarm output ports, output alarm signal to alarm device. 
	ALARM_COM1 (Green)	ALARM_OUT1 can only be used with ALARM_COM1 when connecting to alarm device.
	ALARM_IN1 (Red)	Alarm input ports, receive on-off signal from external alarm source.
	ALARM_IN2 (Brown)	
	ALARM_GND (Yellow & Green)	Grounded terminal.

3.2 Modifying IP Address

In order to make the camera get access to network, please plan IP address reasonably according to the actual network environment.

Step 1 Log in camera web interface in the IE browser.



- The factory default IP address is: 192.168.1.108.
- The default user is admin; the password is set during device initialization.

Step 2 Select **Setup > Network > TCP/IP** and the system will display the interface of "TCP/IP", which is shown in Figure 3-2.

Figure 3-2 TCP/IP

Host Name	TPCDome
Ethernet Card	Wire(DEFAULT)
Mode	<input checked="" type="radio"/> Static <input type="radio"/> DHCP
MAC Address	3c . ef . 8c . ed . 2c . ac
IP Version	IPv4
IP Address	10 . 15 . 23 . 91
Subnet Mask	255 . 255 . 0 . 0
Default Gateway	10 . 15 . 0 . 1
Preferred DNS	8 . 8 . 8 . 8
Alternate DNS	8 . 8 . 4 . 4
<input checked="" type="checkbox"/> Enable ARP/Ping to set IP address service	
Default Refresh Save	

Step 3 Configure relevant info of IP address, and click **Save**.

3.3 Live Video



Different devices might have different WEB interfaces, the figure in this document is just for reference, please refer to the document *WEB Operation Manual* in the disk and the actual interface for more details.

Step 4 Log in camera web interface in the IE browser.




- IP address is the one which has been modified.
- Default user is admin; the password has been set during device initialization.

Step 5 Click **Login** and the system will display the WEB main interface, which is shown in Figure 3-3.



It will prompt you to install plug-in for the first system login, please save and install plug-in according to prompt. The WEB interface will refresh automatically after plug-in installation is completed, then live video will show up.

Figure 3-3 The live interface

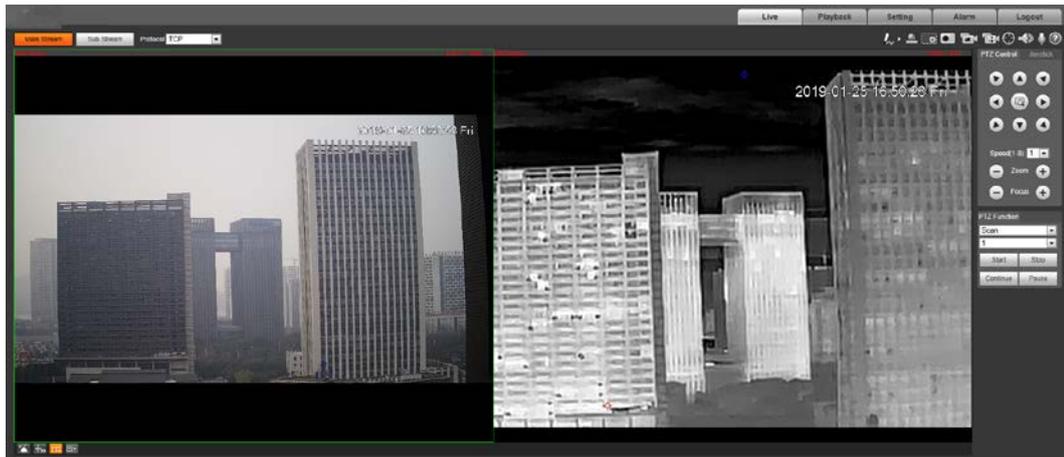

4 Installation



- Make sure the mounting surface is strong enough to hold at least eight times of the camera weight.
- The following figure is for reference only, and the actual product shall prevail.

4.1 Cable Preparation

Selecting Needed Video Cable

- 75 ohm.
- Full cable with copper conductor.
- 95% knitted copper shield.

Table 4-1 Video cable

International Model	Max Transmission Distance (Ft/M)
RG59/U	750Ft/229M
RG6/U	1,000Ft/305M
RG11/U	1,500Ft/457M

Selecting Needed Power Cable



It is recommended to install the matched power within 5m from the device if it is allowed; but if not, then it needs to extend the power supply cable, but it has to guarantee the voltage of the device input port (thermal hybrid dome output cable) is no lower than 12V±20% DC.

Selecting Needed Signal Cable

All signal cables (audio, alarm input and output and RS-485 etc.) are recommended to use 0.56mm (24AWG) and above cable as lengthened wire signal cable.

4.2 Installing Camera

4.2.1 (Optional) Installing SD Card



- Please cut off the device power before installing SD card.
- Be cautious and do not mistake Micro SD card slot for reset hole. Long press the reset button for 4 seconds–5 seconds and you will reset your Camera.
- Please check if the waterproof ring is installed properly before closing the cover, otherwise, it will affect the waterproof performance of the device.

Figure 4-1 Installing SD card

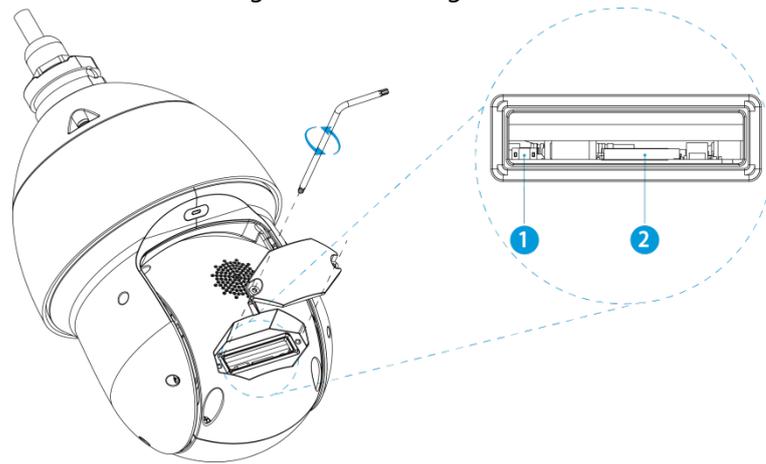


Table 4-2 Camera component list

No.	Name	No.	Name
1	Reset hole	2	Micro SD card slot

4.2.2 Fixing Camera

The hybrid speed dome supports four installation modes which are wall mount, hang mount, corner mount and pole mount.



We do not provide brackets in the packing box and if you need them, purchase them separately. For brackets dimensions suitable for your camera, see "2.1.2 Brackets."

Figure 4-2 Wall-mount installation

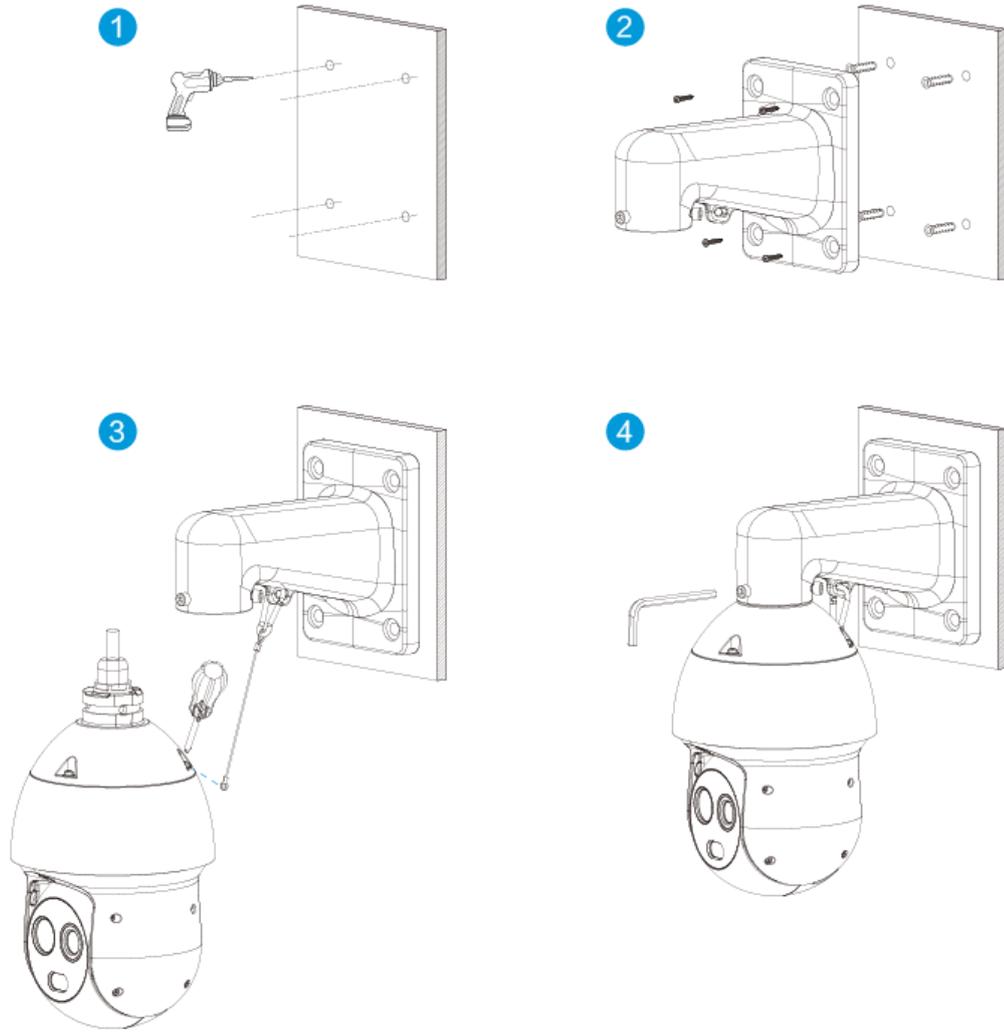


Figure 4-3 Pole-mount installation

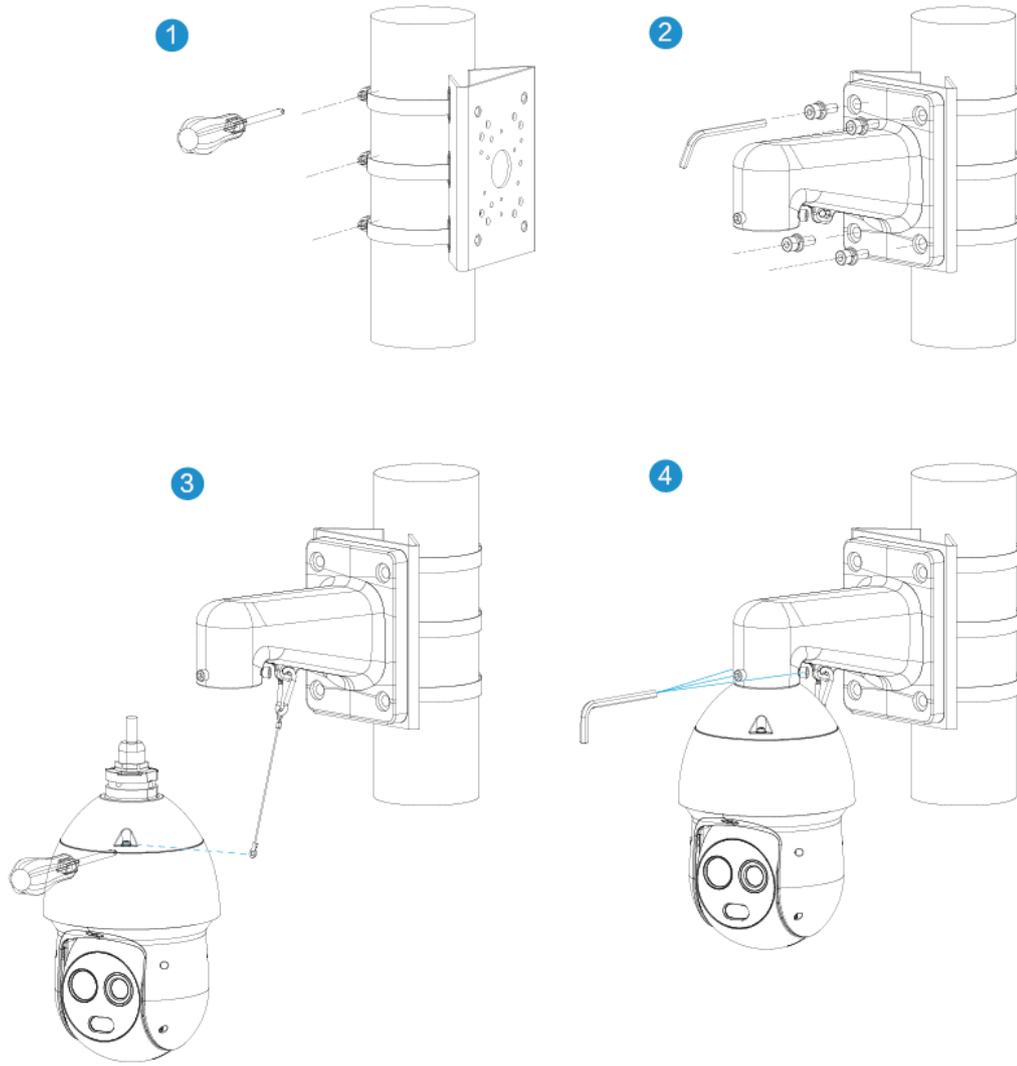


Figure 4-4 Corner-mount installation


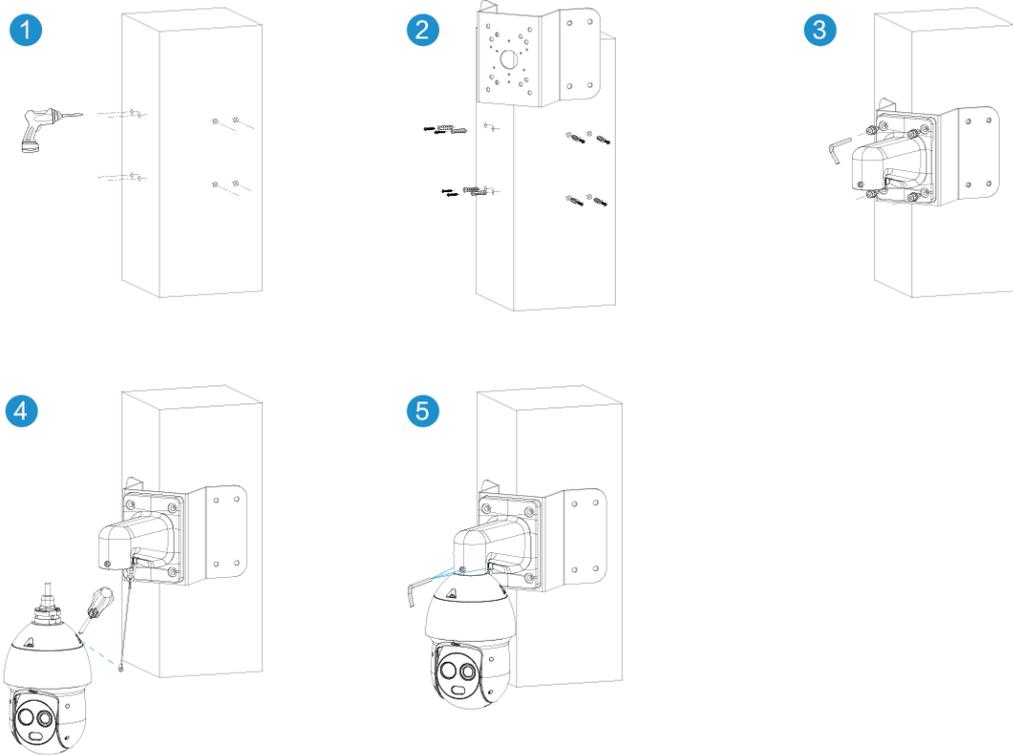


Figure 4-5 Ceiling-mount installation

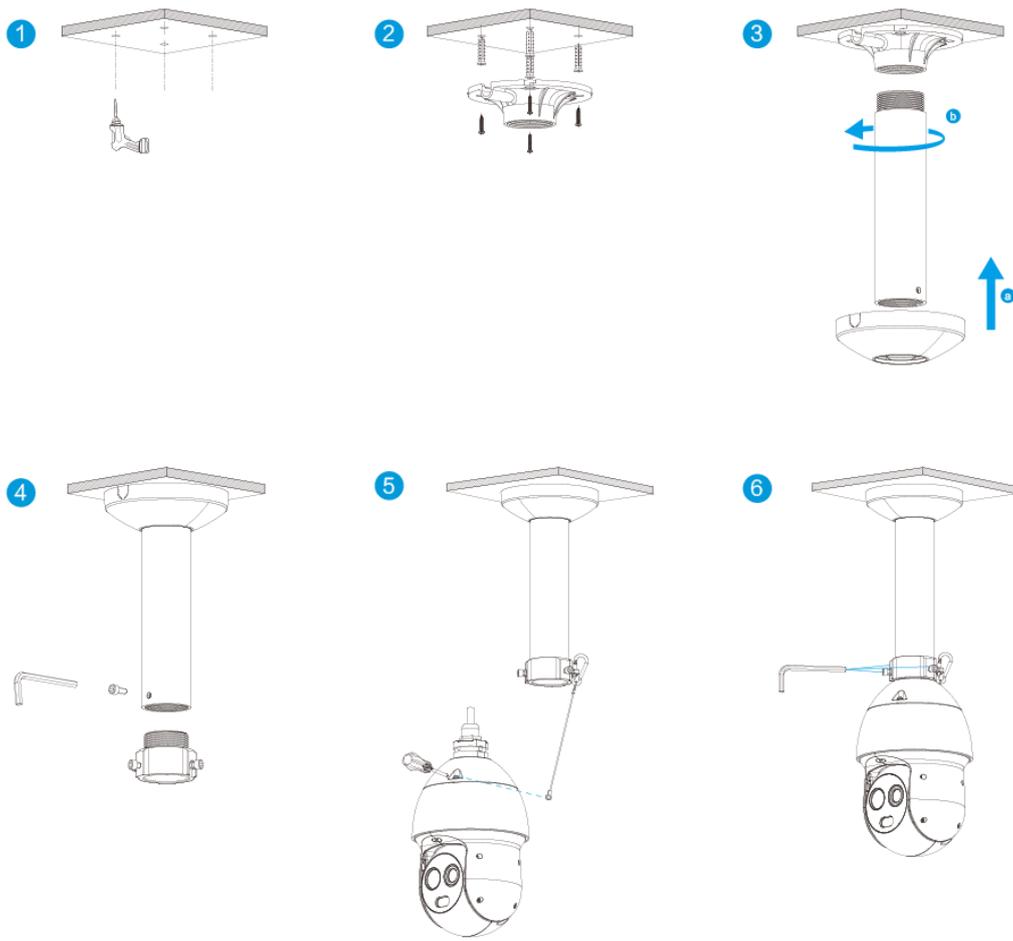


4.2.3 Connecting Cable Ports

Refer to "2.2 Cable" and connect each cable port to corresponding cables. Then use the insulating tape to seal each port to prevent water leakage.

4.2.4 Installing Waterproof Connector

Figure 4-6 Installing waterproof connector for network port

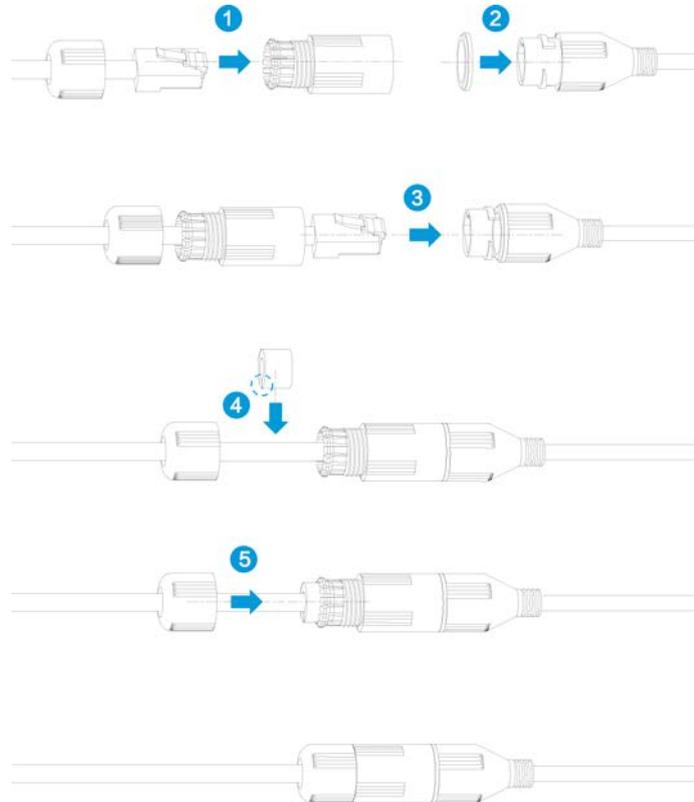

5 Configuring Alarm



It has to cut off power first when connecting cables.

Alarm Input and Output Connection Description

Step 6 Connect alarm input device to alarm input port of I/O cable.

Step 7 Connect alarm output device to alarm output port of I/O cable. Alarm output is relay switch output, and the alarm output port can only be connected to NO alarm device.


Step 8 Open the web interface, select **Setting > Event > Alarm**.

Step 9 Make corresponding settings upon alarm input and output in the alarm setup interface, and then click **Save**.

See Figure 5-1 for the **Alarm** interface.

- Alarm input is corresponding to the alarm input port of device I/O cable. It is to set corresponding NO and NC according to the high and low level signal generated by alarm input device when alarm occurs.
- Alarm output is corresponding to the alarm output port of device I/O cable.


Figure 5-1 The alarm interface

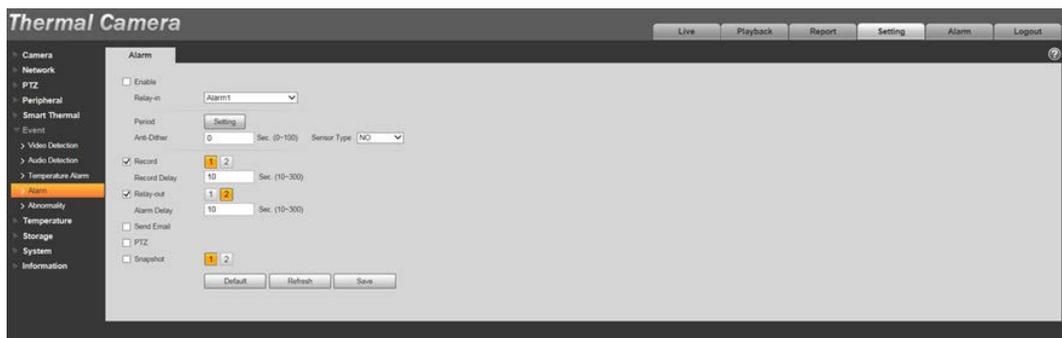

Alarm Input and Output Figures


Alarm input: input signal is idle or grounded; the device can collect different states of alarm input port. Input signal is connected to 3.3V or idle, device collects logic "1"; input signal is grounded, the device collects logic "0".

Figure 5-2 Alarm input

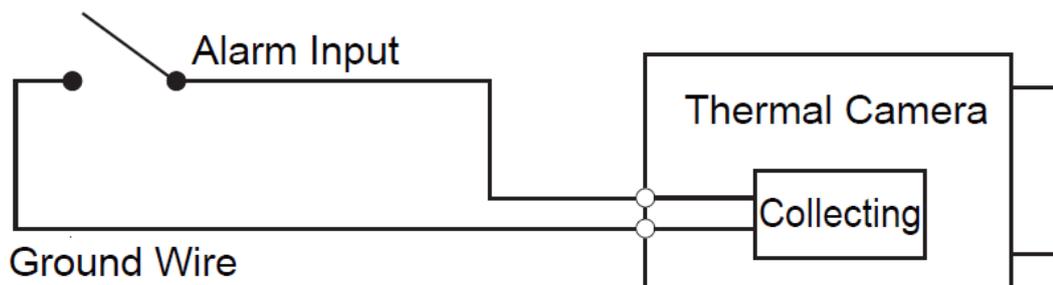

Alarm output: port ALARM_OUT and ALARM_COM form a switch, which can be used to provide alarm output. Normally the switch is on, and the switch will be off when there is alarm output.

Figure 5-3 Alarm output

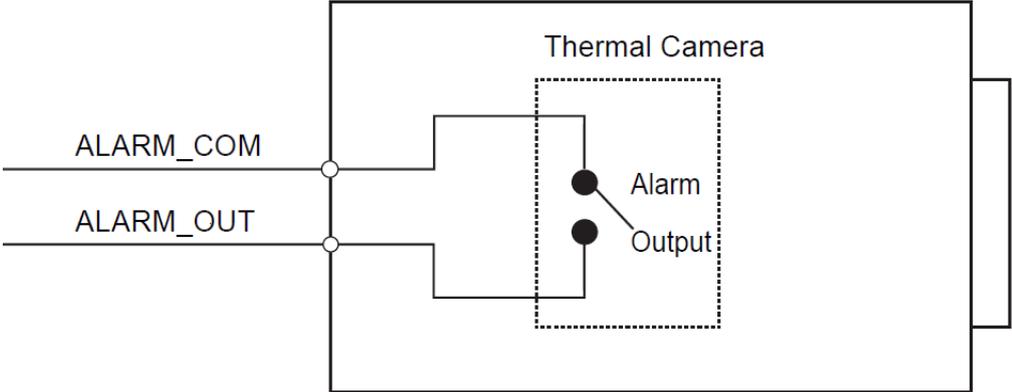

Appendix 1 Cybersecurity Recommendations

Cybersecurity is more than just a buzzword: it's something that pertains to every device that is connected to the internet. IP video surveillance is not immune to cyber risks, but taking basic steps toward protecting and strengthening networks and networked appliances will make them less susceptible to attacks. Below are some tips and recommendations on how to create a more secured security system.

Mandatory actions to be taken for basic device network security:

1. Use Strong Passwords

Please refer to the following suggestions to set passwords:

- The length should not be less than 8 characters;
- Include at least two types of characters; character types include upper and lower case letters, numbers and symbols;
- Do not contain the account name or the account name in reverse order;
- Do not use continuous characters, such as 123, abc, etc.;
- Do not use overlapped characters, such as 111, aaa, etc.;

2. Update Firmware and Client Software in Time

- According to the standard procedure in Tech-industry, we recommend to keep your device (such as NVR, DVR, IP camera, etc.) firmware up-to-date to ensure the system is equipped with the latest security patches and fixes. When the device is connected to the public network, it is recommended to enable the "auto-check for updates" function to obtain timely information of firmware updates released by the manufacturer.
- We suggest that you download and use the latest version of client software.

"Nice to have" recommendations to improve your device network security:

1. Physical Protection

We suggest that you perform physical protection to device, especially storage devices. For example, place the device in a special computer room and cabinet, and implement well-done access control permission and key management to prevent unauthorized personnel from carrying out physical contacts such as damaging hardware, unauthorized connection of removable device (such as USB flash disk, serial port), etc.

2. Change Passwords Regularly

We suggest that you change passwords regularly to reduce the risk of being guessed or cracked.

3. Set and Update Passwords Reset Information Timely

The device supports password reset function. Please set up related information for password reset in time, including the end user's mailbox and password protection questions. If the information changes, please modify it in time. When setting password protection questions, it is suggested not to use those that can be easily guessed.

4. Enable Account Lock

The account lock feature is enabled by default, and we recommend you to keep it on to guarantee the account security. If an attacker attempts to log in with the wrong password several times, the corresponding account and the source IP address will be locked.

5. Change Default HTTP and Other Service Ports

We suggest you to change default HTTP and other service ports into any set of numbers between 1024~65535, reducing the risk of outsiders being able to guess which ports you are using.

6. Enable HTTPS

We suggest you to enable HTTPS, so that you visit Web service through a secure communication channel.

7. MAC Address Binding

We recommend you to bind the IP and MAC address of the gateway to the device, thus reducing the risk of ARP spoofing.

8. Assign Accounts and Privileges Reasonably

According to business and management requirements, reasonably add users and assign a minimum set of permissions to them.

9. Disable Unnecessary Services and Choose Secure Modes

If not needed, it is recommended to turn off some services such as SNMP, SMTP, UPnP, etc., to reduce risks.

If necessary, it is highly recommended that you use safe modes, including but not limited to the following services:

- SNMP: Choose SNMP v3, and set up strong encryption passwords and authentication passwords.
- SMTP: Choose TLS to access mailbox server.
- FTP: Choose SFTP, and set up strong passwords.
- AP hotspot: Choose WPA2-PSK encryption mode, and set up strong passwords.

10. Audio and Video Encrypted Transmission

If your audio and video data contents are very important or sensitive, we recommend that you use encrypted transmission function, to reduce the risk of audio and video data being stolen during transmission.

Reminder: encrypted transmission will cause some loss in transmission efficiency.

11. Secure Auditing

- Check online users: we suggest that you check online users regularly to see if the device is logged in without authorization.
- Check device log: By viewing the logs, you can know the IP addresses that were used to log in to your devices and their key operations.

12. Network Log

Due to the limited storage capacity of the device, the stored log is limited. If you need to save the log for a long time, it is recommended that you enable the network log function to ensure that the critical logs are synchronized to the network log server for tracing.

13. Construct a Safe Network Environment

In order to better ensure the safety of device and reduce potential cyber risks, we recommend:

- Disable the port mapping function of the router to avoid direct access to the intranet devices from external network.
- The network should be partitioned and isolated according to the actual network needs. If there are no communication requirements between two sub networks, it is suggested to use VLAN, network GAP and other technologies to partition the network, so as to achieve the network isolation effect.
- Establish the 802.1x access authentication system to reduce the risk of unauthorized access to private networks.
- Enable IP/MAC address filtering function to limit the range of hosts allowed to access the device.