

## iDS-TCV500-BE/iDS-TCV900-BE High Performance ANPR Capture Unit



## DeepinView

- 5 MP (2/3" GMOS), 2464 × 2056 @ 50 fps
- 9 MP (1" GMOS), 4096 × 2160 @ 25 fps
- Color: 0.001 Lux@(F1.4, AGC ON)
- H.265, H.264, MJPEG
- 60 dB SNR
- 3D DNR
- Alarm I/O
- Two defined streams
- Built-in micro SD/TF card, up to 128 GB
- License plate recognition (LPR)
- Vehicle type recognition
- Vehicle color recognition
- Vehicle manufacturer recognition
- Detection sensitivity: > 98%
- LPR accuracy: > 98%



## Superiority

- Dedicated camera for ANPR
  - HD resolution
  - Professional shutter speed control
- Built-in ANPR engine, equipped with deep learning algorithm
- Capable of recognizing multiple features and detecting multiple violations
  - Vehicle type recognition
  - Vehicle color recognition
  - Vehicle manufacturer recognition
  - Radar speed detection
  - Driving on lane line detection
  - Illegal lane change detection
  - Wrong-way driving detection
  - Seatbelt detection
  - Phone call detection

## Application

- Vehicle control
- Traffic monitoring
- Toll collection
- Security

## Scenarios

- Highway
- Tunnel
- Toll station
- Urban road



## Specification

Camera	iDS-TCV500-BE		iDS-TCV900-BE	
Image Sensor	5 MP (2/3" GMOS)		9 MP (1" GMOS)	
Min. Illumination	Color: 0.001 Lux@(F1.4, AGC ON)			
Shutter Speed	50 μs to 20,000 μs			
Day & Night	IR cut filter			
Digital Noise Reduction	2D/3D DNR			
SNR	60 dB			
Lens				
Focal Length	15 to 50 mm		11 to 40 mm	25 mm
Aperture	F1.4-C		F1.6-25	F1.4
Focus	Manual			
FOV	CS-Mount Horizontal: 42.7° to 13.7° Vertical: 23.4° to 7.6°		CS-Mount Horizontal: 62° to 23.6° Vertical: 32.2° to 12.2°	CS-Mount Horizontal: 31° Vertical: 16.9°
White Light				
Light Range	Up to 30 m		Up to 27 m	
Compression Standard				
Video Compression	Main stream: H.265/H.264/MJPEG Sub-stream: H.265/H.264/MJPEG			
H.264 Type	Baseline profile/Main profile/High profile			
H.265 Type	Baseline profile/Main profile/High profile			
Video Bit Rate	32 Kbps to 16 Mbps			
Smart Feature				
Recognition	License plate recognition			
Coverage	Up to 2 lanes		2 to 3 lanes	
Trigger Mode	External I/O trigger/Radar trigger/Video trigger			
Supplement Light Type	External strobe/flash/solid light			
Smart Function	Vehicle type classification, vehicle color recognition, no-plate vehicle capture, moving direction detection			
Road Traffic and Vehicle Detection				
Country/Region	<b>Middle East:</b> The United Arab Emirates (Abu Dhabi, Ajman, Dubai, Fujairah, Ras Al Khaimah, Sharjah and Umm Al Quwain), Qatar, Iran, Iraq, Egypt, Jordan, Kuwait, Saudi Arabia, Pakistan, Oman, Lebanon, Bahrain <b>Africa:</b> Nigeria, Kenya, Ivory Coast , South Africa, Tanzania, Mauritius, Morocco, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Senegal, Algeria <b>Asia-Pacific:</b> Australia, New Zealand, Indonesia, Malaysia, Singapore, South Korea, Thailand, Vietnam, the Philippines, Hong Kong, Macao, Taiwan, Burma, India, Mongolia, Cambodia, Laos, Bangladesh			

	<b>America:</b> The United States of America, Canada, Argentina, Chile, Paraguay, Uruguay, El Salvador, Bolivia, Colombia, Brazil, Ecuador, Peru, Mexico, Panama, Costa Rica, Trinidad and Tobago, the Dominican Republic, Guatemala <b>Europe:</b> Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, the Republic of North Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, the UK, Ireland, Germany, Italy, Austria, Israel, Palestinian State, Belgium, Luxembourg, Albania, Kosovo <b>Russian-Speaking Regions:</b> Azerbaijan, Belarus, Kazakhstan, Lithuania, Georgia, Estonia, Latvia, Russia, Ukraine, Moldova, Uzbekistan, Kyrgyzstan, Armenia		
Accuracy (Under recommended installation and lighting conditions)	Capture rate > 98% Vehicle moving direction recognition accuracy > 98.5% LPR accuracy > 98% Mistaken capture rate < 2% <b>European and Russian-Speaking Regions:</b> LPR accuracy > 98% Country/Region recognition accuracy > 95%		
No License Plate Detection	Supported		
Motorcycle LPR	Supported		
Vehicle Type	Car/Van/Bus/Truck/Light Truck/SUV_MPV/Pickup/Pedestrian/Motorcycle/Tricycle		
Vehicle Color	Red, yellow, green, blue, pink, purple, cyan, brown, white, grey, black		
Vehicle Manufacturer	84 manufacturers: Hyundai, Toyota, KIA, Honda, Volkswagen, Benz, Nissan, Ford, Isuzu, BMW, Chevrolet, Mitsubishi, Renault, Opel, Suzuki, Skoda, Daewoo, Audi, Mazda, GAC HINO, Peugeot, SsangYong, Citroen, Fiat, Scania, MAN, Volvo, Lexus, Seat, Land Rover, Daihatsu, Dongwo, Subaru, Iveco, MINI, JEEP, Porsche, Chery, Dodge, Chrysler, Acura, Alfa Romeo, Great Wall, Infiniti, Smart, Saic Maxus, JAC, Jaguar, GMC, Lincoln, JMC, SAAB, FAW, Yutong, Guangzhou Yunbao, Joylong, Geely, Cadillac, JBC, An’kai, Haima, Foton, King Long, Dongfeng, Geely-Emgrand, Perodua, UD, BYD, Renault Samsung, Proton, HICOM, Malaysia_Unknown 1, Hyundai-Rohens, SsangYong-Old Version, Equus-Old Version, CNHTC, Rolls-Royce, Beiben Truck, Haval, Hino, Kia-Borrego, Chang’an, Alfa, FORO		
License Plate Color Recognition	Customized to support		
Driving on Lane Line Detection	Supported (only in strobe light mode)		
Illegal Lane Change Detection	Supported (only in strobe light mode)		
Wrong-way Driving Detection	Supported		
Emergency Lane Occupation	Supported (truck forbidden lane, emergency lane, urban bus lane)		
Seatbelt Detection	Supported (with flash supplement light)		
Phone Call Detection	Supported (with flash supplement light)		
Capture Speed Range	5 to 250 km/h		
<b>Image</b>			
Max. Resolution	2464 × 2056	4096 × 2160	
Main Stream	50 Hz: 50 fps (2448 × 2048, 2464 × 2056, 2048 × 1536, 1920 × 1080) 60 Hz: 30 fps(2448 × 2048, 2464 × 2056, 2048 × 1536, 1920 × 1080)	50 Hz: 25 fps (4096 × 2160, 1920 × 1080, 1280 × 720) 60 Hz: 30 fps (4096 × 2160, 1920 × 1080, 1280 × 720)	
Sub-Stream	1920 × 1080, 1280 × 720, 704 × 576, 352	1920 × 1080, 704 × 576	

	× 288	
Image Enhancement	BLC, HLC, 3D DNR	
Image Settings	Rotate mode, saturation, brightness, contrast, sharpness, AGC, and white balance are adjustable by client software or web browser.	Saturation, brightness, contrast, sharpness, AGC, and white balance are adjustable by client software or web browser.
SVC	H.264 and H.265 encoding	
Day/Night Switch	Auto/Scheduled/Triggered by alarm in	
Picture Overlay	Logo picture can be overlaid on video with 128 × 128 24-bit bmp format.	
<b>Network</b>		
Network Storage	Micro SD/TF card (128 GB), local storage and CVR, NVR, ANR	
Alarm Trigger	HDD error, network disconnected, IP address conflicted, vehicle detector exception, traffic light detector exception	
Protocols	TCP/IP, HTTP, HTTPS, FTP, DNS, RTP, RTSP, RTCP, NTP, IPv6, UDP	
Security Measures	Password protection, HTTPS encryption, digest authentication for HTTP/HTTPS, digest authentication for ONVIF (Version 2.1)	
General Function	One-key reset, three streams, heartbeat, password protection, watermark	
API	ONVIF (Version 2.1, PROFILE S, PROFILE G), ISAPI, SDK	
Simultaneous Live View	Up to 6 channels	
User/Host	Up to 32 users 3 user levels: administrator, operator, and user	
Client	iVMS-8600, iVMS-4200 (Only for video live view and LPR information search), Hik-Central Master, Hik-Central Pro	
Web Browser	IE8-IE11, plug-in free live view supported	
<b>Interface</b>		
Communication Interface	2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet interfaces 3 RS-485 interfaces (half duplex, HIKVISION) 1 RS-232 interface	
Alarm	2 input interfaces (T1, SYNC), 7 output interfaces	
On-board storage	Built-in micro SD/TF card, up to 128 GB	
USB Interface	1 USB 2.0 interface	
<b>General</b>		
Firmware Version	V4.3.1	
Operating System	Linux	
Certifications	CE, FCC, RoHS	
Operating Conditions	Temperature: -40 °C to 60 °C (-40 °F to 140 °F) Humidity: 95% or less (non-condensing)	
Power Supply	24 VDC ± 20%/100 to 240 VAC	
Protection Level	IP66	
Heater	Supported	
Material	Aluminum alloy	
Dimensions	With package: 175.68 × 137.5 × 443.99 mm (6.92" × 5.41" × 17.48")	
Weight	Camera: approx. 6.5 ± 0.5 kg (14.3 ± 1.1 lb)	
Power Consumption	< 30 W	

\* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

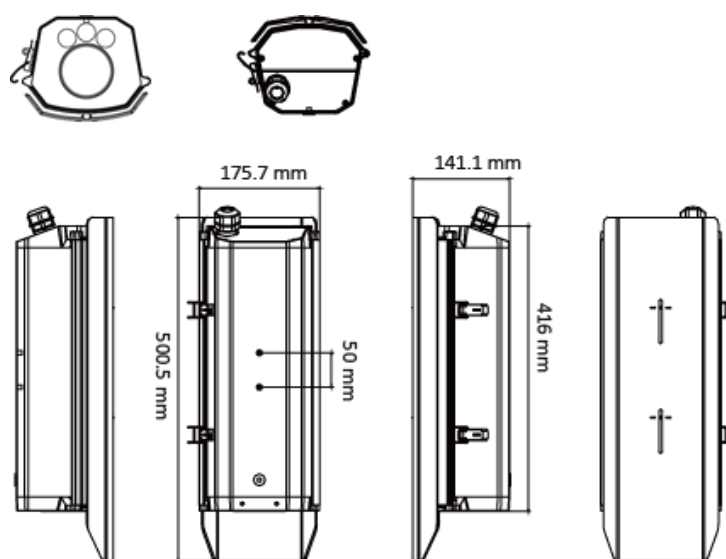
## Available Model

iDS-TCV500-BE




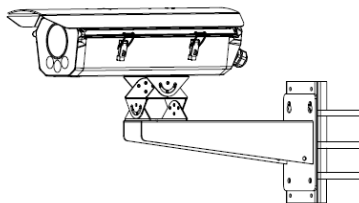
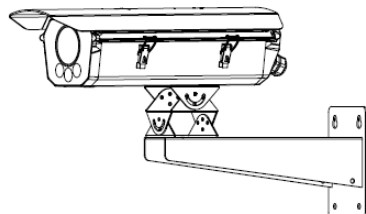
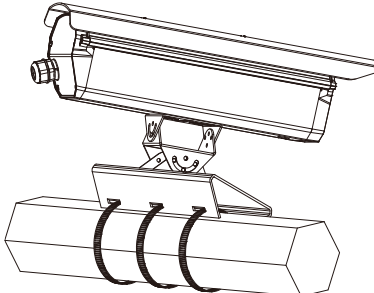
iDS-TCV900-BE

*\*Please decide whether to use anti-corrosion devices or matched hoops and brackets according to the actual working environment.*

## Dimension



## Accessory

DS-1275ZJ/HWB DS-1701ZJ/HWB Vertical Pole Mount	DS-1701ZJ/HWB Wall Mount	DS-1278ZJ/HWB Horizontal Pole Mount
		
		

Distributed by

## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com