


CAMERA

TD-9524S3BL

2MP IR Water-proof Turret Network Camera



- 2MP (1920 × 1080) H.265 coding
- Max.resolution: 1920 × 1080
- ICR auto switch, true day / night, ROI coding
- 3D DNR, digital WDR, HLC, BLC, defog
- 10~20m IR night view distance
- PoE power supply (optional)
- 1CH built-in MIC
- IP 67 ingress protection
- Support dual streams
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics: video blur detection, scene change detection, line crossing detection and region intrusion detection

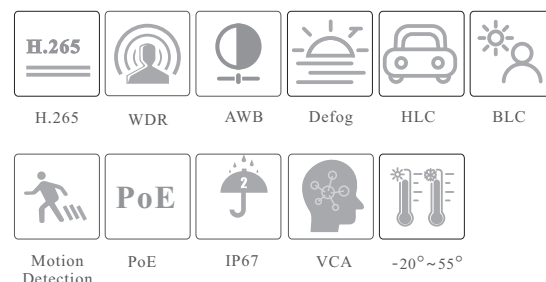

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn


SPECIFICATIONS

Model	TD-9524S3BL
Specifications	
Camera	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920×1080
Electronic Shutter	1s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.0126 lux @F1.2, AGC ON; 0 lux with IR 0.0462 lux @ F2.2, AGC ON; 0 lux with IR
Lens	2.8 mm @F2.2, H.FoV: 102°; V.FoV:54.7°; D.FoV:124.4° 3.6 mm @F2.2, H.FoV: 86.1°; V.FoV:46°; D.FoV:104°
Focus	Fixed
Lens Mount	M12
Wide Dynamic Range	Digital WDR
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~75°; Rotation: 0°~360°
Image	
Video Compression	H.265 / H.264
H.265 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF
Main Stream	60Hz : 1080P/720P(1~30fps); 50Hz : 1080P/720P(1~25fps)
Sub Stream	60Hz : D1/CIF(1~30fps); 50HZ: D1/CIF (1~25fps)
Bit Rate	64 Kbps ~ 4 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Hue, Contrast,Wide Dynamic, Sharpness, NR,etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Audio Compression	G711A/U
Interfaces	
Network	RJ 45
Video Output	No
Audio	1CH built-in MIC
Storage	No
Hardware Reset	No
Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS
Interface Protocol	ONVIF
Storage	Network remote storage
Smart Alarm	Motion detection
Intelligent Analytics	Region intrusion detection, video blur detection, scene change detection and line crossing detection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE	Optional (IEEE802.3af)
IR Distance	10 ~ 20m
Ingress Protection	IP 67

Others

Power Supply	DC12V(PoE power supply optional)
Power Consumption	< 4 W
Operating Environment	- 20 °C ~ 55 °C (-4°F~131°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Φ 94.8 × 82.8
Weight (net)	Approx. 0.287KG
Installation	Ceiling mounting (Wall mounting available with the junction box and bracket)
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

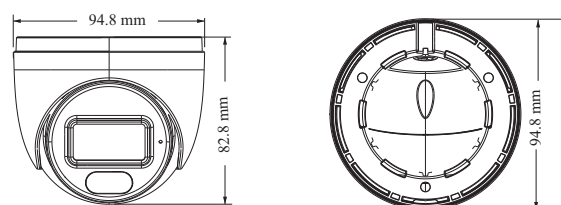

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9524S3BL(D/PE/AR1)
	TD-9524S3BL(D/AR1)