

## DS-KV6103-PE1(C) Video Intercom Villa Door Station



The KV6 series IP villa door station, with small and simple design, supports one-touch button to call the resident's indoor station. Users can view, chat with, and send permission for the visitor via mobile phone in anywhere. The villa door station is powered by the standard PoE, and is no need to wire extra power supply, which is easy for installation and deployment, and is suitable for villa, detached house, etc.

- 2 MP camera with IR supplement
- One-touch button calling design for easier calls
- Built-in card reader module
- Standard PoE power supply
- IP65 protection level
- Convenient Hik-Connect APP mobile control

## ▪ Specification


System parameters	
Operation system	Linux
ROM	32 MB
RAM	256 MB
Processor	Embedded high performance processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	1
Resolution	Main stream: 1920 × 1080p Sub stream: 704 × 576p
FOV	Horizontal: 131° Vertical: 78°
Wide dynamic range (WDR)	Support 120 dB
Supplement light	IR light, up to 3 m
Video compression standard	H.264
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711 U
Audio output	1 built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	/
Face capacity	/
Card capacity	/
Network parameters	
Network protocol	TCP/IP, RSTP
Wi-Fi	/
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	4
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
TAMPER	1
Exit button	1
RS-485	0
USB	/
Wiegand	/
TF card	/
Alarm output	/

Lock control	1 relay, Max. 30 VDC 2 A
Door contact input	1
<b>General</b>	
Button	1 physical button
Installation	Surface mounting
Indicator	/
Weight	Net weight: 0.180 kg Gross weight: 0.388 kg
Protective level	IP65
Working temperature	-40 °C to 53 °C(-40 °F to 127.4 °F)
Working humidity	10% to 95% (no-condensing)
Dimension (W × H × D)	138 mm × 65 mm × 27 mm (5.4" × 2.6" × 1.1")
Battery	/
Application environment	Outdoor
Power consumption	< 10 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Portuguese, Slovak

#### ▪ Available Model

DS-KV6103-PE1(C)

▪ **Dimension**

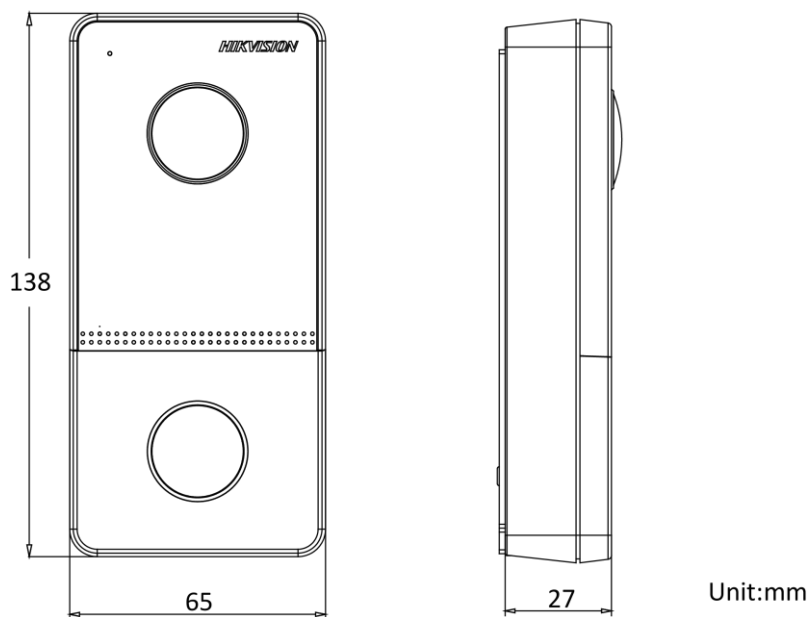

▪ **Accessory**

▪ **Optional**

DS-KAW50-1	DS-KABV6113-RS Villa Door Station Rain Shield	DS-KAW50-1N
		

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

