


Home Network  
**COMMAX**



# Multi Video Door Camera


Model No. DRC-4DB,4DC

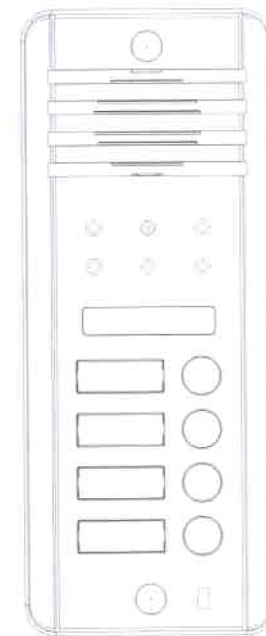

## COMMAX Co.,Ltd.


- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.

## 1. Part Names and its features

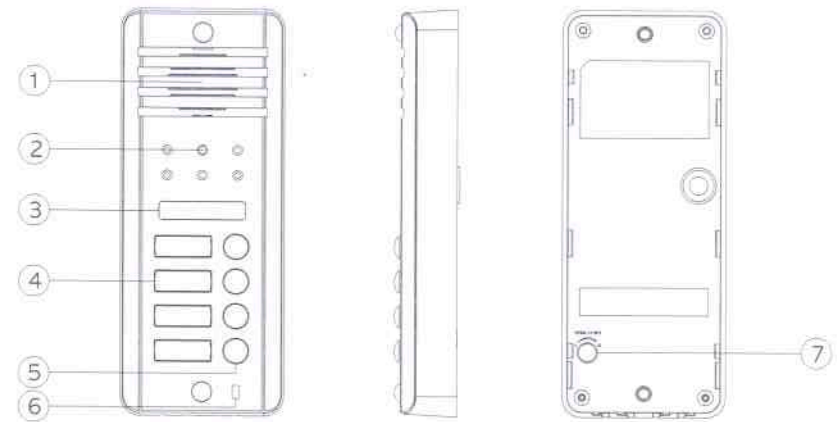


- ① Speaker : It delivers voice from video door phone.
- ② C.C.D Camera Lens : Keep clean from foreign substances
- ③ White LED : It offers clear image at night
- ④ Residence Number Tag : Put the number of each residence
- ⑤ Call button : Call a residence
- ⑥ Microphone : It delivers voice to a residence
- ⑦ Speaker volume control : Control the speaker volume according to it's installation environment

## 2. Accessory

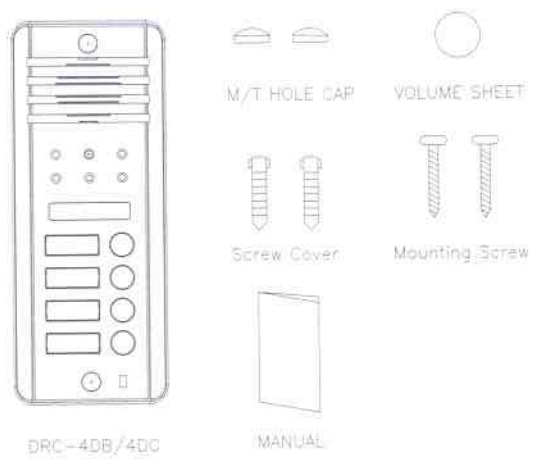

## 3. Wiring and Installation

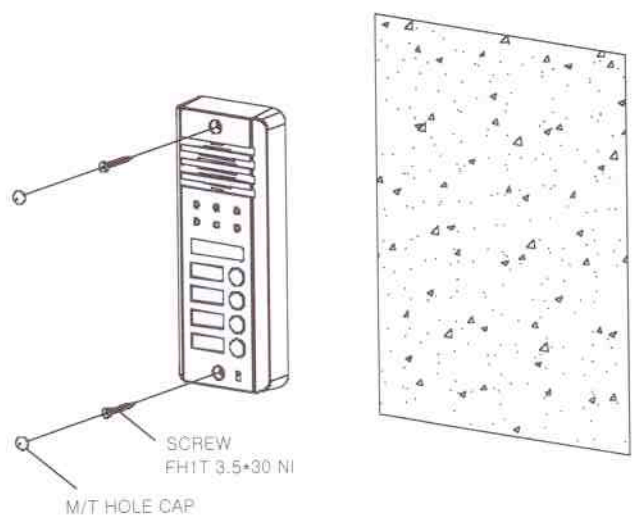


**\*Wiring**  
 Caution : For a hole drilling, please refer to the annexed paper to ensure a hole position and size properly

## 4. Specification

Image Device (Lens)	1/3" or 1/4" C.C.D				
Rated Voltage	DC 12V, power supplied From monitor				
Wiring(Residence)	4 wires in polarity(16 wires) 2 wires in non-priority(Door release)				
Transmission	Voice Switch				
Effective Viewing Angle	Horizontal 55°, Vertical : 40° (70° or 90° : Optional)				
Scanning Frequency	EIA/NTSC	CCIR			
	Horizontal: 15.734kHz, Vertical : 60Hz	Horizontal: 15.625kHz, Vertical: 50Hz			
LED	Embedded IR LED(5 Pie) 4EA-DRC-4DB Embedded White LED(3 Pie) 2EA-DRC-4DC				
Minimum Illumination	0.1Lux (Within 300mm from camera)				
Operating Temperature	-10℃ ~ +40℃				
Dimension(W * H * D)	65.0mm x 162.0mm x 25.0mm				
Weight(g)	285g				
Wiring Distance (TIV Cable)	Diameter (pie)	0.5	0.65	0.8	1
	Distance (m)	28	50	70	115

# 5. Hole Drilling

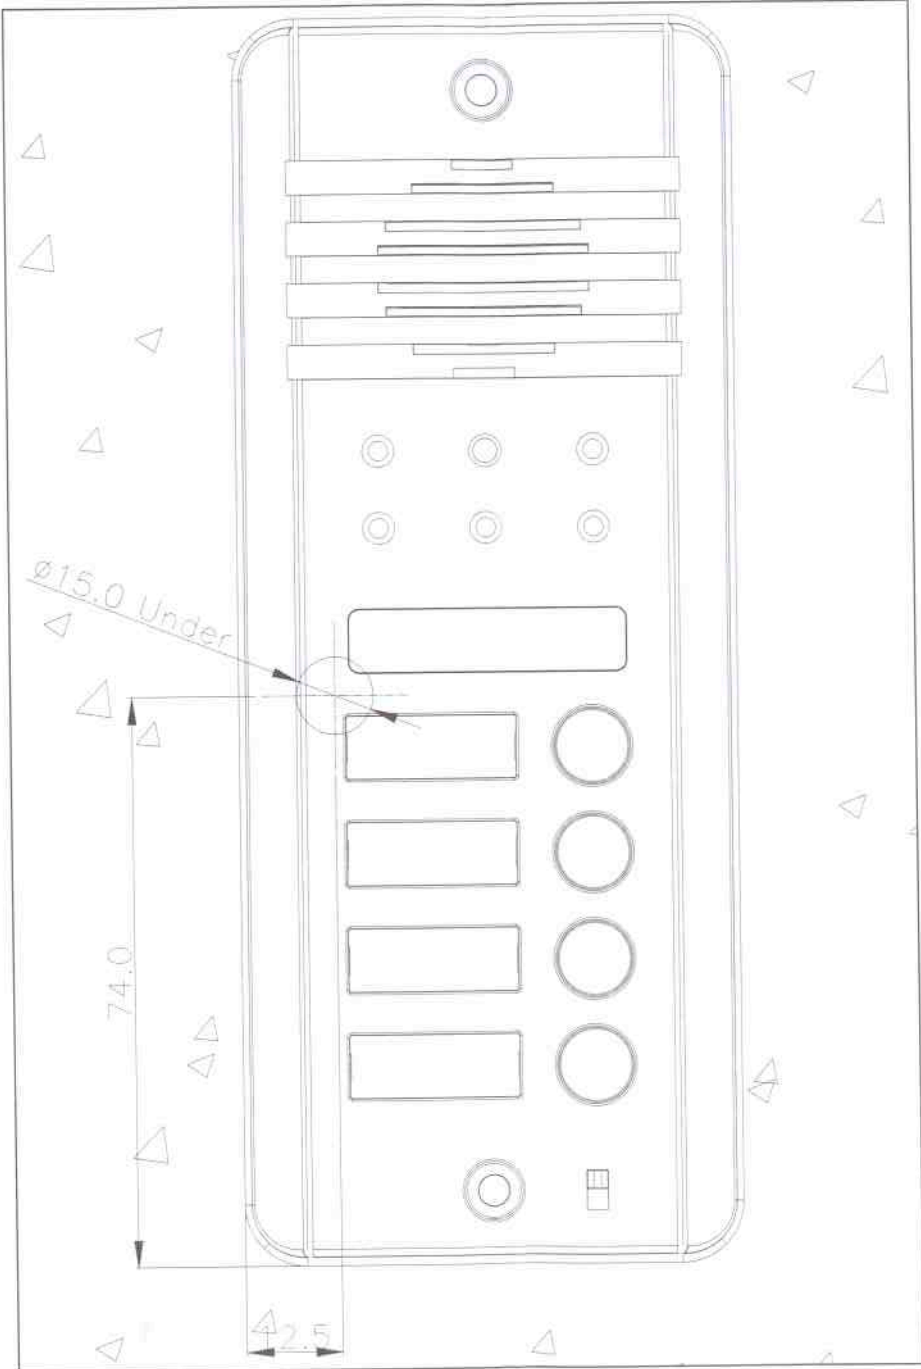

**COMMAX**

Blooming Life, HomeNetwork

**COMMAX Co.,Ltd.**

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea

Int'l Business Dept. : Tel.; +82-31-7393-540-550 Fax.; +82-31-745-2133

Web site : [www.commax.com](http://www.commax.com)

*Printed in Korea / 2008.07.*