


HR901-AFG-82N--10/100M 10 ports PoE Switch

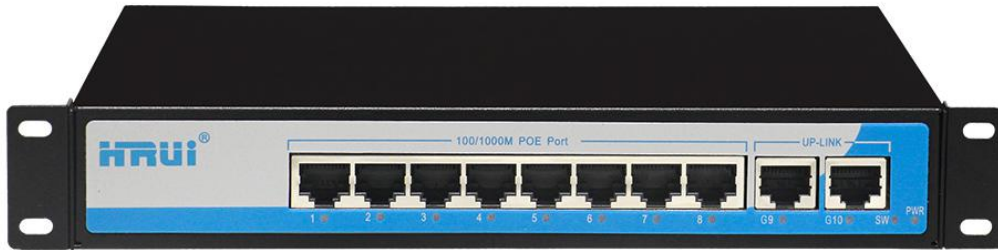

● Features

- ◆ IEEE 802.3af power on up to 8 ports
- ◆ Supply power to wireless access points and surveillance cameras over Cat-5 cabling
- ◆ 10*10/100/1000 Mbps Ports with AutoUplink™
- ◆ Supports PoE power up to 15.4W for each PoE port
- ◆ Supports PoE power up to 150W for all PoE ports
- ◆ Supports PoE IEEE 802.3af compliant PDs
- ◆ Supports IEEE 802.3x flow control for Full-duplex Mode and back pressure for Half-duplex Mode
- ◆ 2K entry MAC address table of the PoE Switch with auto-learning and auto-aging
- ◆ LED indicators for monitoring power, link
- ◆ Internal power adapter supply
- ◆ All PoE Port with 6KV Thunder Protection


● Order information

Model No.	Description
HR901-AFG-82N	10*10/100/1000M POE Switch,IEEE 802.3af,each port 15.4W

● Physical Pic Reference



● Dimension(25.1*16.1*3.7cm, Net Weight: 0.92kg/unit)

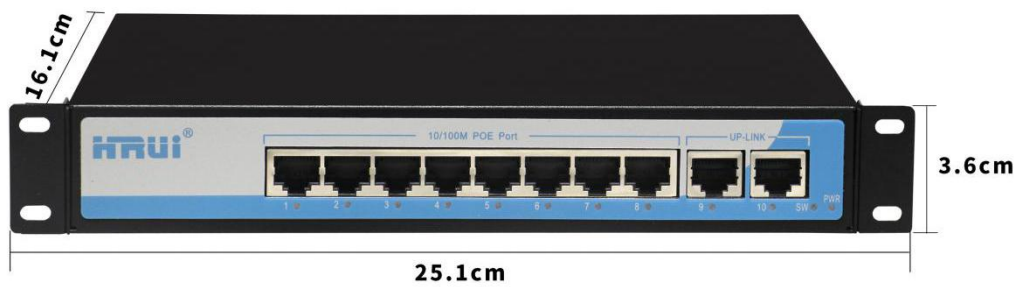

● Package Dimension(30.3*18.1*5.7cm,Gross Weight:1.16kg/unit)



● **Technical parameter list**

Product Name	10-Ports AF PoE Switch with 8 PoE Ports and 2 Uplink
Model	HR901-AFG-82N
Connector Type	10x 10/100/1000M copper cable RJ45 ports(8 PoE ports+2 Uplink)
Network Media	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or more UTP (≤100 meter)
Bandwidth	20Gbps (non-blocking)
Address Database Size	2K
MTBF	100,000 hours
Forwarding Mode	Store-And-Forward
Network Protocols	IEEE 802.3i 10BASET; IEEE 802.3u 100BASETX; IEEE 802.3x Flow Control; IEEE 802.1af DTE Power via MDI; IEEE 802.3af
LED Display	System: power supply; Every Port: connecting, PoE working status
Power Supply	Power input: AC100-240V 50/60Hz; (every country use a custom power plug)
PoE Ports	Port 1-8 support POE
PoE Port Power	15.4W for each POE port
PoE Standard	IEEE 802.3af
Led indicator	PWR: Power LED 1-10: Port LED
Working Environment	Operating Temperature: -20° ~ 55 ° C; Storage Temperature: -40 ° ~ 85 ° C; Operating Humidity: 10% ~ 95%, non-condensing
Certification	CE Mark ,commercial; CE/LVD EN60950, RoHS, FCC
Radiation	CE mark, commercial; FCC Part 15 Class B; VCCI Class B; EN 55022 (CISPR 22), Class B
Warranty	3 year warranty