



WI-PS526G

24FE+2GIGABIT 48V PORTS POE SWITCH
WITH 24-PORT POE




HIGHLIGHTS

- 24 100Mbps Ports with 24 PoE, 2 Gigabit Ports
- Supports PoE power up to 30W for each port
- Supports PoE IEEE 802.3af/at compliant PDs
- Internal power adapter supply 150W
- Support Port VLAN
- LED indicators for LINK/ACT, Power, PoE Status, 100/1000Mbps
- 8K entry MAC address table with auto-learning and auto-aging



TYPICAL APPLICATIONS

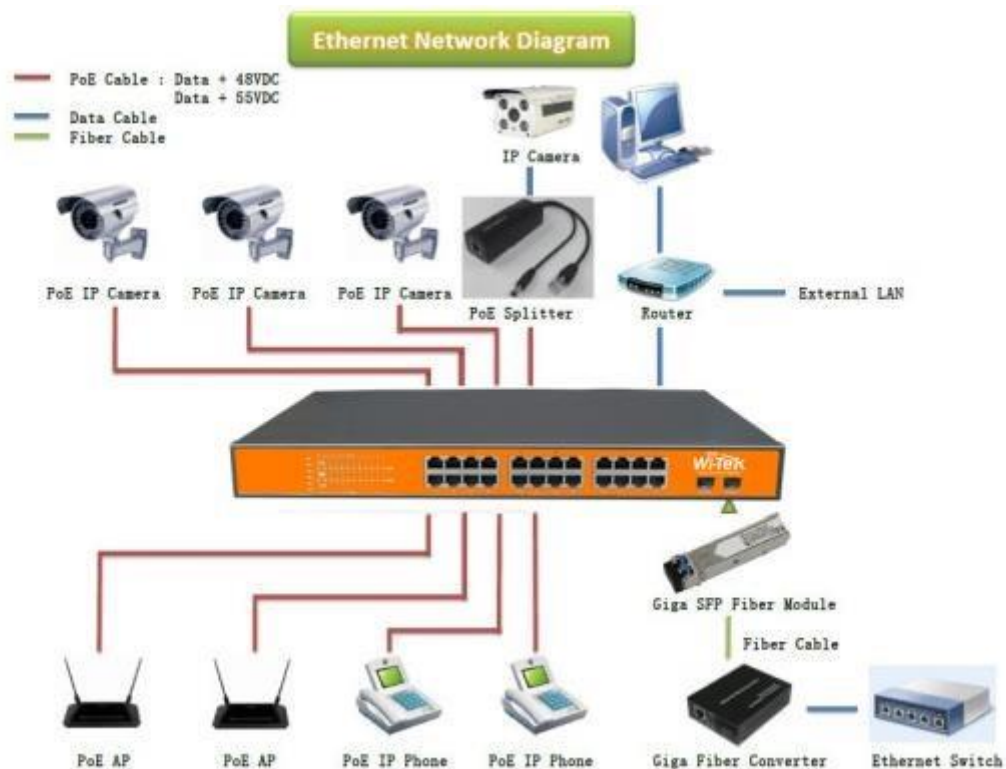

DESCRIPTION

What This Product Does

26-Port Gigabit Switch with 24-Port PoE provides the seamless network connection. It integrates 1000Mbps Gigabit Ethernet and 10/100Mbps Fast Ethernet network capabilities.

How This Product Works

24 Auto-Negotiation RJ45 ports (port-1 to port-24) of the switch support Power over Ethernet (PoE) function. These PoE ports can automatically detect and supply power with those IEEE 802.3af/at compliant Powered Devices (PDs). In this situation, the electrical power is transmitted along with data in one single cable allowing you to expand your network where there are no power lines or outlets, where you wish to fix devices such as APs, IP Cameras or IP Phones, etc.

Easy To Use

WI-PS526G is easy to install and use. It requires no configuration and installation. With outstanding performance and quality, the WIPS526G 26-Port Gigabit Switch with 24-Port PoE is a great selection for expanding your home or office network.

SPECIFICATIONS

HARDWARE FEATURES	
Interface	24 100M POE+2 Gigabit Ports
Network Media	10Base-T: Pair 2 Category 3(Cat3) and above UTP/STP(≤100m) 100Base-TX: Pair 2 Category 5(Cat5) and above UTP/STP(≤100m) 1000Base-T: Pair 4 Category 5(Cat5e) and above UTP/STP(≤100m) 1000Base-SX: 62.5μm/50μm MMF(2m~550m) 1000Base-LX: 62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m)
Fan Quantity	Fanless
Power Consumption	150W (max. with PoE device connected)
External Power Supply	AC 110~265V 50/60HZ
PoE Ports (RJ45)	Standard: 802.3 af/at compliant PoE Ports: Port1- Port24

	Power Supply: 150W
Exchange Capacity	8.8G
Mac Address Table	8K
Dimensions	Product Size : 440mm*290mm*45mm (L*W*H)

SOFTWARE FEATURES	
Transmission Method	Store-And-Forward
Advanced Functions	Priority Function Mac Address Auto-Learning And Auto-Aging Store and forward IEEE 802.3x flow control for Full-duplex Mode Backpressure for Half-duplex Mode

OTHERS	
Certification	CE, FCC, RoHS
Package Contents	POE Switch, Electric Line, Guide Book/Warranty Card, 2L Shape Mount+4 Shim
Environment	Working Temperature: 0°C~40°C Storage temperature: -40°C~70°C Working Humidity: 10%~90% RH non-condensing Storage Humidity: 5%~90% RH non-condensing