



**WI-PS318GF**  
**16GE+2SFP 48V Ports PoE**  
**Switch**  
**with 16-Port PoE Datasheet**




[www.wireless-tek.com](http://www.wireless-tek.com)

## Highlights

- 16GE+2SFP Full Gigabit Switch with 16 PoE
- Supports PoE power up to 30W for each port
- Supports PoE IEEE 802.3af/at compliant PDs
- Internal power adapter supply 350W
- LED indicators for LINK/ACT, Power, PoE Status, 100/1000Mbps
- 16K entry MAC address table with auto-learning and auto-aging



## Typical Applications

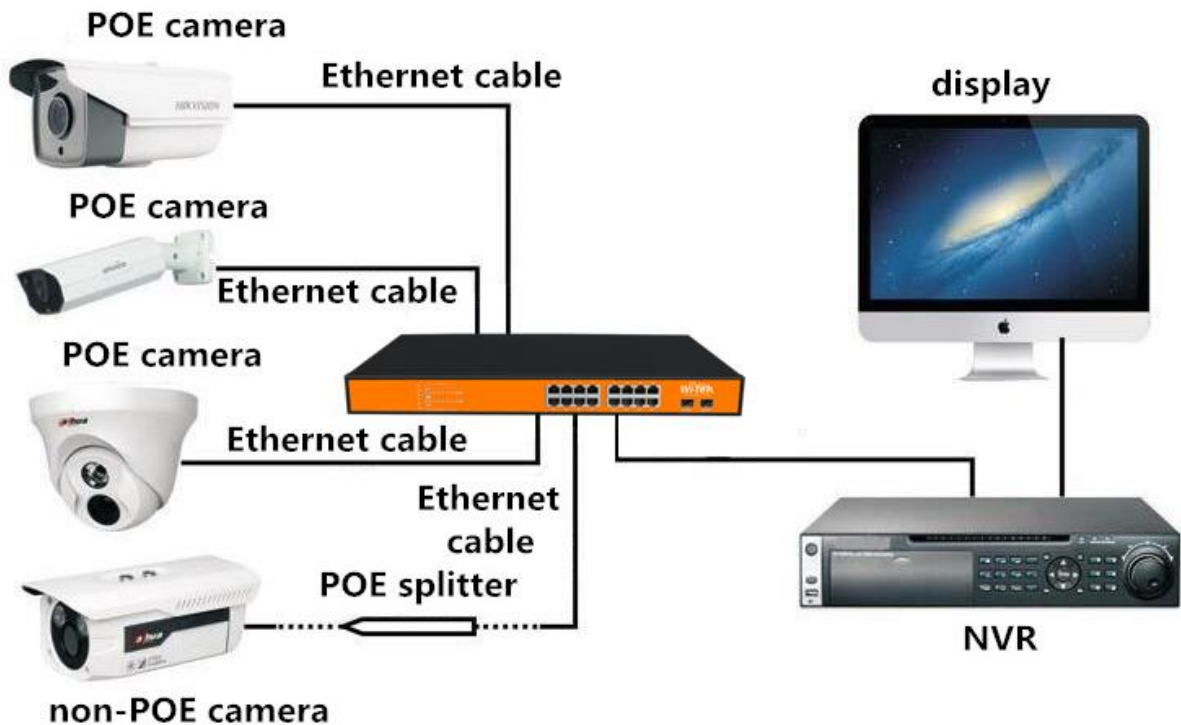

## Description

## What This Product Does

16GE+2SFP Port Gigabit Switch with 16-Port PoE provides the seamless network connection. It integrates 1000Mbps Gigabit Ethernet and 10/100Mbps Fast Ethernet network capabilities.

## How This Product Works

16 Auto-Negotiation RJ45 ports (port-1 to port-16) of the switch support Power over Ethernet (PoE) function. These PoE ports can automatically detect and supply power with those IEEE 802.3af/at compliant Powered Devices (PDs). In this situation, the electrical power is transmitted along with data in one single cable allowing you to expand your network where there are no power lines or outlets, where you wish to fix devices such as APs, IP Cameras or IP Phones, etc.

## Easy To Use

WI-PS318GF is easy to install and use. It requires no configuration and installation. With outstanding performance and quality, the WI-PS318GF 16GE+2SFP Port Gigabit Switch with 16-Port PoE is a great selection for expanding your home or office network.

## Specifications

### HARDWARE FEATURES

<b>Interface</b>	16 1000M POE ports 2 SFP ports
------------------	-----------------------------------

## HARDWARE FEATURES

<b>Network Media</b>	<p>10Base-T: Pair 2 Category 3(Cat3) and above UTP/STP(≤100m)</p> <p>100Base -TX: Pair 2 Category 5(Cat5) and above UTP/STP(≤100m)</p> <p>1000Base-T: Pair 4 Category 5(Cat5e) and above UTP/STP(≤100m)</p> <p>1000Base-SX:62.5μm/50μm MMF(2m~550m)</p> <p>1000Base-L X:62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m)</p>
<b>Fan Quantity</b>	Fanless
<b>Power Consumption</b>	350W (max. with PoE device connected)
<b>External Power Supply</b>	AC 110~265V 50/60HZ
<b>PoE Ports (RJ45)</b>	<p>Standard: 802.3 af/at compliant</p> <p>PoE Ports: Port1- Port16</p> <p>Power Supply: 350W</p>
<b>Exchange Capacity</b>	36G
<b>Mac Address Table</b>	16K

## HARDWARE FEATURES

<b>Dimensions</b>	Product Size: 440mm*290mm*45mm (L*W*H)
-------------------	----------------------------------------------

## SOFTWARE FEATURES

<b>Transmission Method</b>	Store-And-Forward
<b>Advanced Functions</b>	Priority Function Mac Address Auto-Learning And Auto-Aging Store and forward IEEE 802.3x flow control for Full-duplex Mode Backpressure for Half-duplex Mode

## OTHERS

<b>Certification</b>	CE, FCC, RoHS
<b>Package Contents</b>	POE Switch Electric Line Guide Book/Warranty Card 2L Shape Mount+4 Shim
<b>Environment</b>	Working Temperature: 0°C~40°C Storage temperature : -40°C~70°C

## OTHERS

---

---

	<p>Working Humidity :</p>
--	---------------------------

10%~90% RH

non-condensing

Storage Humidity:

5%~90% RH non-condensing

---