



WI-PS326GF
24GE+2SFP 48V Ports PoE
Switch
with 24-Port PoE Datasheet




www.wireless-tek.com

Highlights

- 24GE+2SFP Full Gigabit Switch with 24 PoE
- Supports PoE power up to 30W for each port
- Supports PoE IEEE 802.3af/at compliant PDs
- Internal power adapter supply 350W
- LED indicators for LINK/ACT, Power, PoE Status, 100/1000Mbps
- 16K entry MAC address table with auto-learning and auto-aging



Typical Applications

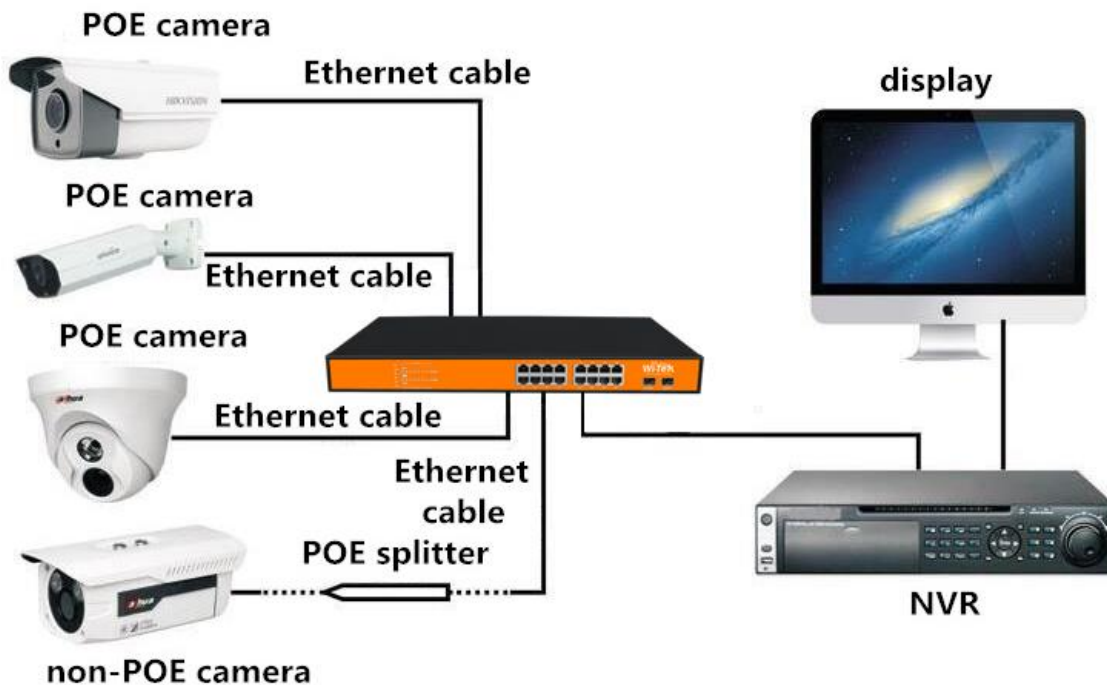

Description

What This Product Does

24GE+2SFP Port Gigabit Switch with 24-Port PoE provides the seamless network connection. It integrates 1000Mbps Gigabit Ethernet and 10/100Mbps Fast Ethernet network capabilities.

How This Product Works

24 Auto-Negotiation RJ45 ports (port-1 to port-24) of the switch support Power over Ethernet (PoE) function. These PoE ports can automatically detect and supply power with those IEEE 802.3af/at compliant Powered Devices (PDs). In this situation, the electrical power is transmitted along with data in one single cable allowing you to expand your network where there are no power lines or outlets, where you wish to fix devices such as APs, IP Cameras or IP Phones, etc.

Easy To Use

WI-PS326GF is easy to install and use. It requires no configuration and installation. With outstanding performance and quality, the WI-PS326GF 24GE+2SFP Port Gigabit Switch with 24-Port PoE is a great selection for expanding your home or office network.

Specifications

HARDWARE FEATURES

Interface	24 1000M POE Ports 2 SFP Ports
Network Media	10Base -T:Pair 2 Category 3(Cat3) and above UTP/STP(≤100m)

HARDWARE FEATURES

	<p>100Base-TX: Pair 2 Category 5(Cat5) and above UTP/STP(≤100m)</p> <p>1000Base-T: Pair 4 Category 5(Cat5e) and above UTP/STP(≤100m)</p> <p>1000Base-SX:62.5μm/50μm MMF(2m~550m)</p> <p>1000Base-LX:62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m)</p>
Fan Quantity	Fanless
Power Consumption	350W (max. with PoE device connected)
External Power Supply	AC 110~265V 50/60HZ
PoE Ports (RJ45)	<p>Standard: 802.3 af/at compliant</p> <p>PoE Ports: Port1- Port24</p> <p>Power Supply: 400W</p>
Exchange Capacity	52G
Mac Address Table	16K
Dimensions	<p>Product Size: 440mm*290mm*45mm (L*W*H)</p>

SOFTWARE FEATURES

Transmission Method	Store-And-Forward
Advanced Functions	Priority Function Mac Address Auto-Learning And Auto-Aging Store and forward IEEE 802.3x flow control for Full-duplex Mode Backpressure for Half-duplex Mode

OTHERS

Certification	CE, FCC, RoHS
Package Contents	POE Switch Electric Line Guide Book/Warranty Card 2L Shape Mount+4 Shim
Environment	Working Temperature: 0°C~40°C Storage temperature : -40°C~70°C Working Humidity : 10%~90% RH non-condensing Storage Humidity: 5%~90% RH non-condensing

