



**PRO SERIES**

## ProCapture-WP


IP65-rated Outdoor Weather-proof  
Fingerprint Access Control Reader

**ProCapture-WP** is a next-generation IP65-rated outdoor weather-proof access control reader utilizing advanced SilkID fingerprint sensor technology.



### Biometric Performance:

Reliable, durable and highly accurate SilkID fingerprint sensor with latest fingerprint matching algorithm which provides less than 1.5 second user recognition.



### Capacity:

Stores up to 20,000 fingerprint templates and 10,000 cards. Data can be backed up to a USB flash drive and transferred to another ProCapture-WP in the absence of network connectivity.



### Communication:

Weigand output for connecting to an access control panel and Ethernet port for fast and reliable network communication. Optional Wi-Fi available.



### Options:

ProCapture-WP can be configured with optional internal modules which read HID Prox, HID iClass or 13.56 MHz Mifare cards.



### Easy Operation and Management:

Works without a computer. Complete setup and programming can be done via the ProCapture-WP keypad and embedded firmware. Audio-Visual Indication for acceptance and rejection of valid/invalid fingerprints, cards and passwords.



### Full Access Control Built In:


Relay Outputs for electric lock and alarm. Inputs for door status sensor and request to exit hardware. Supports multiple time zones and personnel groups for programming valid entry zones.




### For Software Developers:

Free SDK and development tools are available for developers/partners who wish to integrate ProCapture-WP with any application which requires verifying people. Custom development is also available for OEM partners upon request.

# Configuration

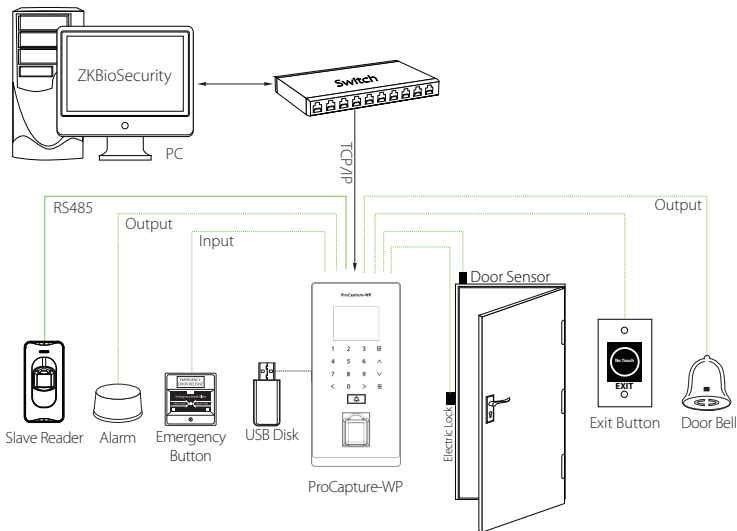

# Dimensions

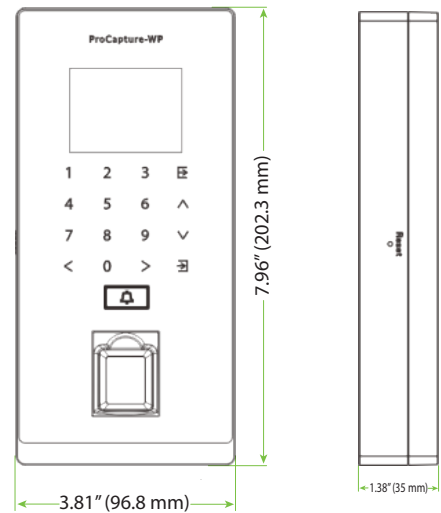

# Specifications

### Capacity

Fingerprints: 20,000  
Cards: 10,000

### Access Control Interface

Lock Relay Output  
Alarm Output/Auxiliary Input  
Exit Button/Door Sensor  
Doorbell Output

### Communication

TCP/IP, RS485 (for slave reader)  
USB Host  
Wiegand Input/Output

### Hardware

SilkID Fingerprint Sensor  
2.4 Inch TFT-LCD Touch Screen  
125 kHz ZKAccess Card Reader  
Tamper Switch Alarm

### Standard Functions

Access Levels/Groups/Holidays  
DST/Bell Schedule  
Duress Mode (Password)  
Anti-Passback  
Record Query  
Custom Wallpaper & Screen Saver

### Software Compatibility

ZKBioSecurity

### Additional Info

Working Temperature:  
14° F to 122° F (-10° C to 50° C)  
Dimensions: 8 x 3.5 x 1 inch  
(200.5 x 88.5 x 28.7 mm)  
Package Includes: 12V 3A Power Supply

### Power

Operating Voltage 12V DC  
Current Draw < 500mA

# Part Numbers

ProCapture-WP

ProCapture-WP-HID


ProCapture-WP-Mifare

ProCapture-WP-iClass


# What's in the Box




ProCapture-WP




Installation Template



Back Plate




Measuring Tape




Network Cable



Screws




AC Power Adapter



Screwdriver



Cables



Diode



## ZKAccess

6 Kingsbridge Road, Unit 8, Fairfield, NJ 07004  
Phone: (862) 505-2101 • Fax: (862) 204-5906 • sales@zkaccess.com • www.zkaccess.com

© Copyright 2016, ZKTeco Inc. ZKTeco Logo and ZKAccess Logo are registered trademarks of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

